

powered by

**Q.ANTUM DUO Z**

# Q.BOOST ML-G2 405-415

ENDURING HIGH  
PERFORMANCE



**Q CELLS**  
Yield Security



#### BREAKING THE 20% EFFICIENCY BARRIER

Q.ANTUM DUO Z Technology with zero gap cell layout boosts module efficiency up to 21.4%.



#### INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



#### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Hot-Spot Protect and Traceable Quality Tra.Q™.



#### EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa).



#### A RELIABLE INVESTMENT

Inclusive 20-year product warranty and 25-year linear performance warranty<sup>1</sup>.



#### STATE OF THE ART MODULE TECHNOLOGY

Q.ANTUM DUO combines cutting edge cell separation and innovative wiring with Q.ANTUM Technology.

<sup>1</sup> See data sheet on rear for further information.

#### THE IDEAL SOLUTION FOR:




Rooftop arrays on  
residential buildings

Engineered in Germany

**Q CELLS**

## MECHANICAL SPECIFICATION

|              |  |
|--------------|--|
| Format       | 1879 mm × 1045 mm × 32 mm (including frame)                                  |
| Weight       | 22.0 kg  |
| Front Cover  | 3.2 mm thermally pre-stressed glass with anti-reflection technology          |
| Back Cover   | Composite film   |
| Frame        | Black anodised aluminium   |
| Cell         | 6 × 22 monocrystalline Q.ANTUM solar half cells                              |
| Junction box | 53-101 mm × 32-60 mm × 15-18 mm<br>Protection class IP67, with bypass diodes |
| Cable        | 4 mm <sup>2</sup> Solar cable; (+) ≥ 1250 mm, (-) ≥ 1250 mm                  |
| Connector    | Stäubli MC4; IP68  |

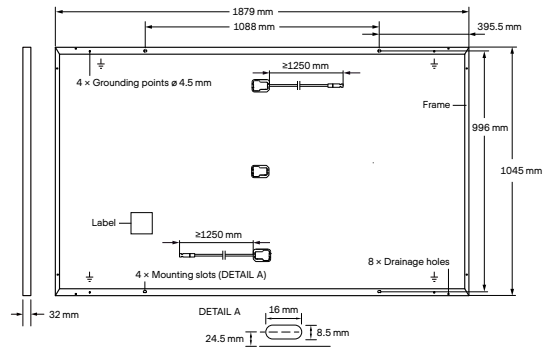


## ELECTRICAL CHARACTERISTICS

| POWER CLASS   |                                    |               | 405    | 415    |
|---|------------------------------------|---------------|--------|--------|
| MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5 W / -5 W) |                                    |               |        |        |
| Minimum   | Power at MPP <sup>1</sup>          | $P_{MPP}$ [W] | 405    | 415    |
|   | Short Circuit Current <sup>1</sup> | $I_{SC}$ [A]  | 11.19  | 11.26  |
|   | Open Circuit Voltage <sup>1</sup>  | $V_{OC}$ [V]  | 45.09  | 45.16  |
|   | Current at MPP                     | $I_{MPP}$ [A] | 10.70  | 10.82  |
|   | Voltage at MPP                     | $V_{MPP}$ [V] | 37.85  | 38.37  |
|   | Efficiency <sup>1</sup>            | $\eta$ [%]    | ≥ 20.6 | ≥ 21.1 |
| MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>2</sup>                           |                                    |               |        |        |
| Minimum   | Power at MPP                       | $P_{MPP}$ [W] | 303.9  | 311.4  |
|   | Short Circuit Current              | $I_{SC}$ [A]  | 9.02   | 9.07   |
|   | Open Circuit Voltage               | $V_{OC}$ [V]  | 42.52  | 42.59  |
|   | Current at MPP                     | $I_{MPP}$ [A] | 8.42   | 8.53   |
|   | Voltage at MPP                     | $V_{MPP}$ [V] | 36.04  | 36.49  |

<sup>1</sup>Measurement tolerances  $P_{MPP} \pm 3\%$ ;  $I_{SC}$ ;  $V_{OC} \pm 5\%$  at STC: 1000 W/m<sup>2</sup>, 25 ± 2°C, AM 1.5 according to IEC 60904-3 • 2800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5


### Q CELLS PERFORMANCE WARRANTY

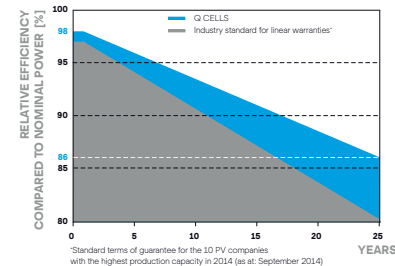

At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

### PERFORMANCE AT LOW IRRADIANCE

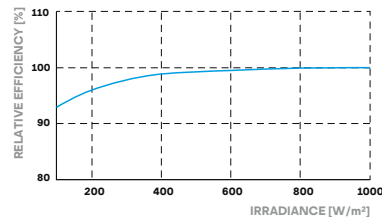

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m<sup>2</sup>).

### TEMPERATURE COEFFICIENTS

|                                      |                |       |                                      |               |        |
|--------------------------------------|----------------|-------|--------------------------------------|---------------|--------|
| Temperature Coefficient of $I_{SC}$  | $\alpha$ [%/K] | +0.04 | Temperature Coefficient of $V_{OC}$  | $\beta$ [%/K] | -0.27  |
| Temperature Coefficient of $P_{MPP}$ | $\gamma$ [%/K] | -0.34 | Nominal Module Operating Temperature | NMOT [°C]     | 43 ± 3 |

## PROPERTIES FOR SYSTEM DESIGN

|                               |               |             |   |               |
|-------------------------------|---------------|-------------|---|---------------|
| Maximum System Voltage        | $V_{SYS}$ [V] | 1000        | PV module classification                        | Class II      |
| Maximum Reverse Current       | $I_R$ [A]     | 20          | Fire Rating based on ANSI / UL 61730            | C / TYPE 2    |
| Max. Design Load, Push / Pull | [Pa]          | 3600 / 2660 | Permitted Module Temperature on Continuous Duty | -40°C - +85°C |
| Max. Test Load, Push / Pull   | [Pa]          | 5400 / 4000 |   |               |

### QUALIFICATIONS AND CERTIFICATES

IEC 61215:2016; IEC 61730:2016.  
This data sheet complies with DIN EN 50380.  
Certification holder:  
Hanwha Q CELLS Australia Pty Ltd



### PACKAGING INFORMATION

|                    |         |         |         |        |            |            |            |
|--------------------|---------|---------|---------|--------|------------|------------|------------|
| Vertical packaging | 1970 mm | 1150 mm | 1215 mm | 765 kg | 28 pallets | 24 pallets | 33 modules |
|--------------------|---------|---------|---------|--------|------------|------------|------------|

**Note:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Made in Malaysia

Hanwha Q CELLS Australia Pty Ltd

Suite 1, Level 1, 15 Blue Street, North Sydney, NSW 2060, Australia | TEL +61 (0)2 9016 3033 | FAX +61 (0)2 9016 3032 | EMAIL q-cells-australia@q-cells.com | WEB www.q-cells.com/au